

Inspired by Nature, Built to Last.



KEO GLOBAL INDUSTRIES LLP

Sr. No. 398/1, 399/2, 399/3, 8-A National Highway, Haripar Kerala Road,
Nava Sadulka, Morbi 363642 Gujarat, INDIA

Call: +91 99799 92236, Mail: info@keosurfaces.com, Web: www.keosurfaces.com



PRIME
Series

www.keosurfaces.com

GROWING TOWARDS



A BRIGHT FUTURE

www.keosurfaces.com

KEO[®]
SURFACES

PRIME
Series

SURFACES SHAPE OUR ECOSYSTEM INTO A LIVEABLE ONE.

Since decades ago, when we first established a name for ourselves in building material industry producing top-notch goods and services, our company has come a long way. KEO Surfaces coalesces artistry and innovation to produce exquisitely crafted SPC flooring solutions that look and feel authentic. Our name, which translates from French as "superior, extraordinary, and precious," perfectly encapsulates who we are and what we stand for. By utilising cutting-edge technology and unmatched expertise, we strive to offer our customers the finest flooring solutions. We offer sustainable flooring solutions with excellent quality and long-lasting durability, backed by the substantial knowledge and experience we have gained through our prior endeavours.

KEO[®]
SURFACES





SURFACES ARE MOULDED WITH THE FORCE OF NATURE.

Diligence is an inherent feature of KE0 Surfaces. We strive to deliver a melange of strength, craftsmanship, and size that delivers function benefits as per the requirements of Spaces. Our manufacturing facilities employ the best technology from world leaders in SPC flooring manufacturing equipment. Our surfaces deliver the impact and the experience of pizazz. The ridged core SPC floor's exhibit is one of its primary qualities on account of the state-of-the-art Patented interlocking technology made with the precision of German engineering. Securing the spaces with the multiple layered robust product composition. Our R&D facilities already have a foot firmly planted in tomorrow, so that we are technically empowered.

HOMAG

leitz

UNILIN
FOR SMART LIVING



NATURAL WOOD INSPIRATION

BRING THE BEAUTY OF NATURE INDOORS WITH WOOD-LIKE SURFACES.

Natural wood inspiration can bring warmth and texture to any space. Whether it's a rustic cabin or a modern home, incorporating natural wood elements can create a cozy and inviting atmosphere. The versatility of wood allows for endless design possibilities that can be tailored to any personal style.

www.keosurfaces.com





PRIME

Series

VERSATILE AND DURABLE SURFACE SOLUTIONS.

KEO surface solutions are designed to withstand fire and scratches while also being stain-resistant, easy to clean, and 100% waterproof. Additionally, they are environmentally friendly, as they can be recycled.



www.keosurfaces.com



100% Waterproof



Patented Interlock System For Easy Installation



Real To Touch Texture



No Termite No Bugs



Excellent Acoustic



High Dimensional Stability



Scratch & Stain Resistant



Fire Retardant



Easy To Clean




Recyclable

Available Colors




Size

181 X 1220 mm

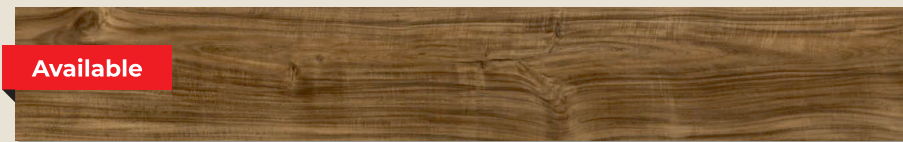

230 x 1220 mm

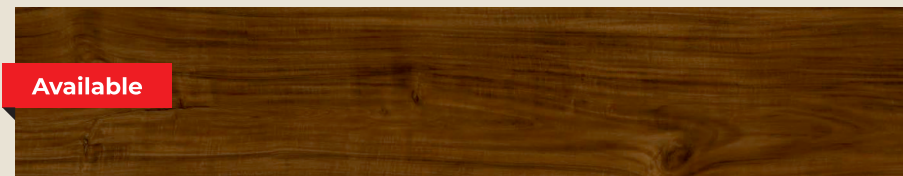

230 x 1524 mm



310 x 601 mm




THERE ARE INFINITE SURFACES IN THE MULTIVERSE.

Rigid core flooring from Keo Surfaces, blends the beauty of wood with the sturdiness of stone. We provide an array of SPC Flooring alternatives to make your space distinctive. Despite being adaptable and durable, our flooring follows a methodology that takes into account specific placement and space constraints. Inspired by the true nature of Earthy hues and textures, each of these is inventively manufactured and has a unique characteristic which makes it perfect for a variety of applications.


5 TO 7.5^{mm}
THICKNESS



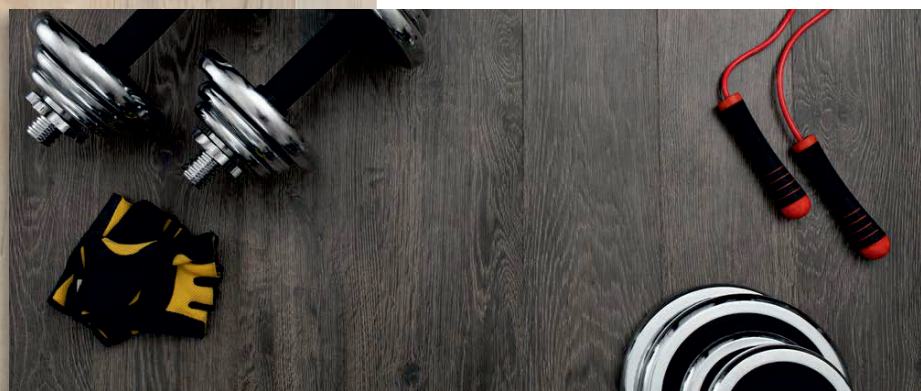

PRODUCT COMPOSITION

Stone Polymer composite (SPC) also known as rigid core flooring features a core that comprises mainly of limestone & PVC which results in its adaptability & strength.

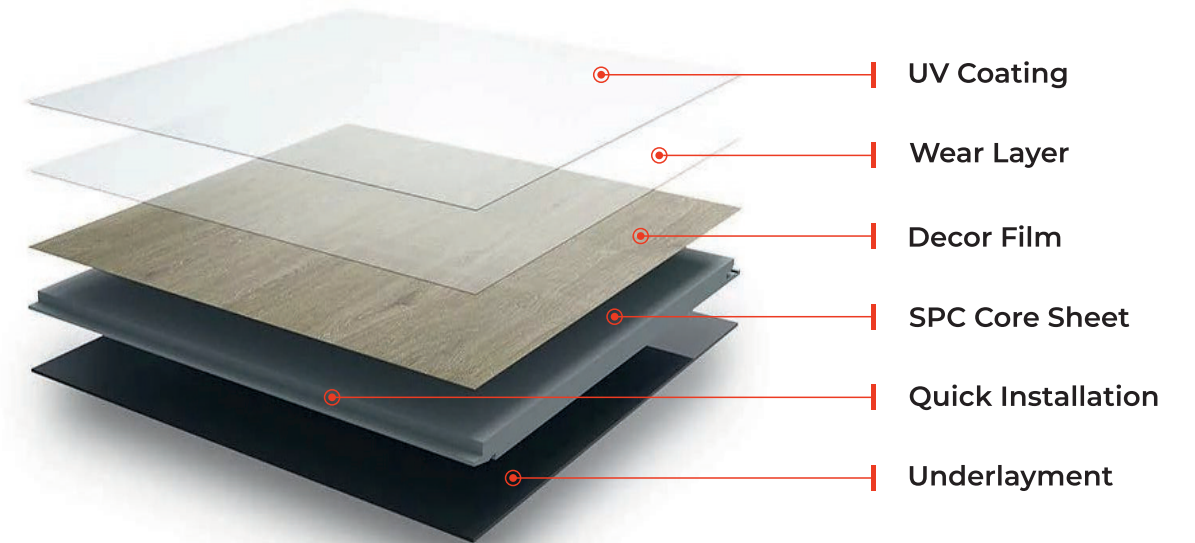

KEO[®]
SURFACES

PRIME Series



FANCY OAK
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



CHARNWOOD OAK
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



MAPLE BEIGE
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



MAPLE BROWN
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



ASH MIX
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



BOSTON NATURAL
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



PARKHURST OAK
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



PINE CHARCOAL
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



SANDY OAK
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



GREY OAK
181x1220mm



PRIME Series



RUSTY BROWN
181x1220mm



KEO[®]
SURFACES

PRIME Series



BEACHWOOD OAK
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



CHICAGO GRIS
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



ALPINE GREY
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



BOSTON GREY
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



DALLAS BROWN
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



COLUMBIA BEIGE
181x1220mm

www.keosurfaces.com



KEO[®]
SURFACES

PRIME Series



ASPEN WHITE
181x1220mm

www.keosurfaces.com




The technical specifications of SPC (Stone Polymer Composite) flooring are exceptional, combining endurance and creativity. Its strong core structure is made of a unique composite product which ensures exceptional dimensional stability. This material is resistant to water, scratches, stains and fire making it an excellent flooring alternative for a variety of conditions.

The presence of our state of art laboratory within our manufacturing facility demonstrates our commitment to quality. Every batch of manufacturing is extensively tested here in accordance with the industry standards. This careful process guarantees that each product meets our exacting quality standards, ensuring the dependability and performance of our offerings. We not only uphold the highest standards by maintaining our in-house testing lab, but we also provide our customers with the assurance of consistent and outstanding quality in every batch of SPC flooring we create.

Technical Performances

Test Parameters	Standard	Specification / Criteria	Result
Dimension Stability	ISO 23999	< 0.10%	Pass
Curling	ISO 23999	< 1 mm	Pass
Micro scratch resistant	EN 16094	> 25000 Cycle (4N Load)	Pass
Residual Indentation	ACTME 1914	< 0.10mm	Pass
Shore D hardness	ASTM D 2240	> 15 to < 70 HD	Pass
Scratch Resistant		> 6 N	Pass
Abrasion Resistant	EN 13329	AC4 (> 4000 cycle)	Pass
Pill strength	EN ISO 24345	> 50 N / 50 mm	Pass
Locking Strength	ISO 24334	> 250 N / 100 mm	Pass
Density	ASTM D 792	1.95 to 2.05 g/cm ²	Pass
Castor Chair test	ISO 4918	25000 Cycle (90 kg load)	Pass
Large Ball Impact test	EN 438	1600 mm Height (320 gm load)	Pass

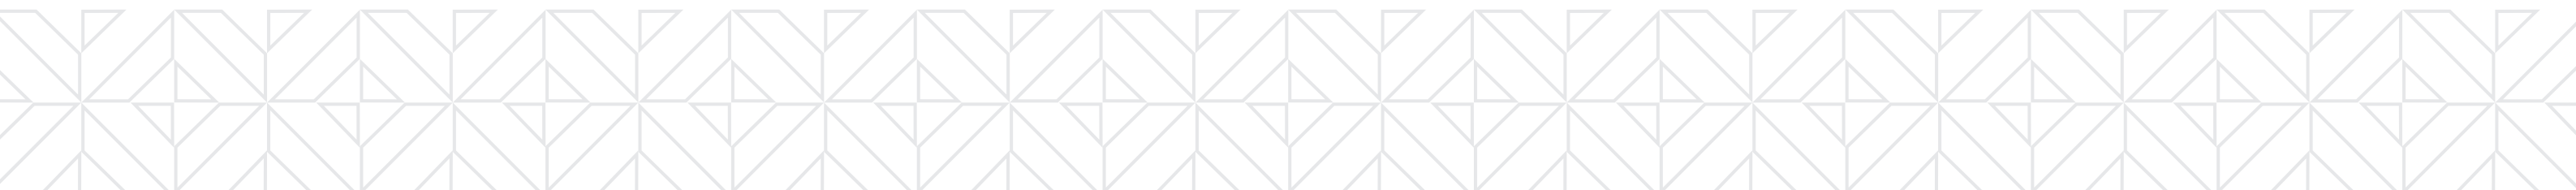



Packing Detail

SIZE

181 X 1220mm

4+1

(4mm core + 1mm ixpe)
(27 Pallet 27 Ton)

BOX

10 pc Plank
2.21 Sqm
17.5 kg (approx)

PALLET

55 Box
121.55 Sqm
Gross 1003 Kg

CONTAINER

27 Pallet
1485 Box
3281.85 Sqm
Gross 27067.5 Kg

SIZE

181 X 1220mm

5+1

(5mm core + 1mm ixpe)
(27 Pallet 27 Ton)

BOX

8 pc Plank
1.77 Sqm
17.8 kg (approx)

PALLET

55 Box
97.35 Sqm
Gross 1019 Kg

CONTAINER

27 Pallet
1485 Box
2628.45 Sqm
Gross 27513 Kg

